

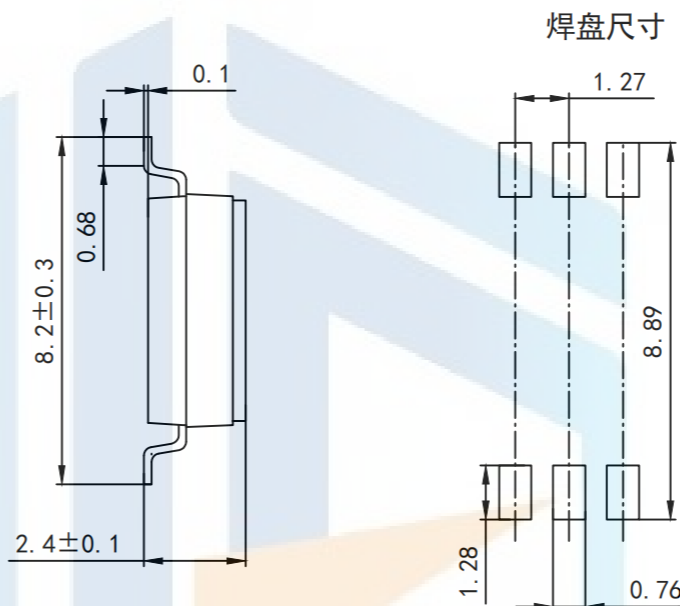


RoHS2.0
Compliant

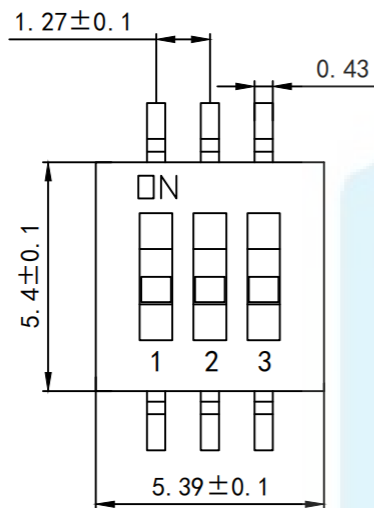

电路图

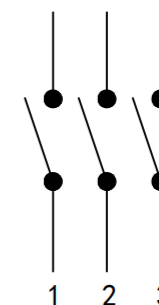

1. Performance:

Current specification: 100mA, 50VDC

Contact Resistance: 100mΩ Max

Insulation resistance: 100MΩ

Service life: 1000 times

Operating force: 200g Max.

Operating temperature: $-30^{\circ}\text{C} \sim 80^{\circ}\text{C}$


2. Welding requirements:

Reflow soldering: 250 degrees, 5 seconds

TOLERANCE

X. XXX	± 0.05
X. XX	± 0.15
X. X	± 0.20
X.	± 0.30
ANGLE	$\pm 5.0^{\circ}$

PROTECTON



东莞市恒祺电子科技有限公司

Dongguan Hengqi Electronic Technology Co., Ltd

<https://www.hq-dz.com>

phone: 15812872448

TITLE:

拨码开关

PART NO: HS003

DRAWING NO: 5.39*5.4*1.27

DRAWN:

DATE:

18-10-08

UNIT:
mm

CHECKED:

DATE:

18-10-08

SCALE:
FULL

APPROVED:

DATE:

18-10-08

SIZE:
A4