
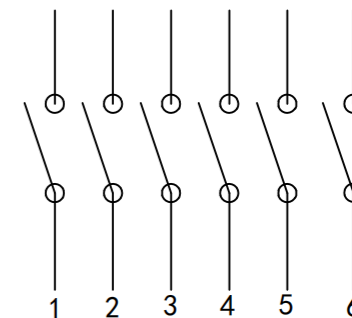
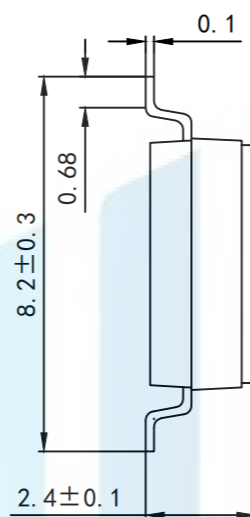


RoHS2.0  
Compliant

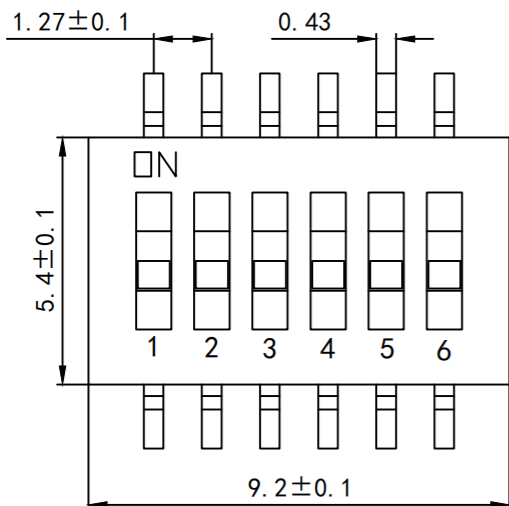

SCHEMATIC

Pad size

1. Performance:

Current specification: 100mA, 50VDC

Contact Resistance: 100mΩ Max

Insulation resistance: 100MΩ

Service life: 1000 times

Operating force: 200g Max.

Operating temperature:  $-30^{\circ}\text{C} \sim 80^{\circ}\text{C}$


2. Welding requirements:

Reflow soldering: 250 degrees, 5 second

TOLERANCE

X. XXX	$\pm 0.05$
X. XX	$\pm 0.15$
X. X	$\pm 0.20$
X.	$\pm 0.30$
ANGLE	$\pm 5.0^{\circ}$

PROTECTON



东莞市恒祺电子科技有限公司

Dongguan Hengqi Electronic Technology Co., Ltd

<https://www.hq-dz.com>

phone: 15812872448

TITLE:

拨码开关

PART NO: HS006

DRAWING NO: 9.2\*5.4\*1.27

DRAWN:

DATE:

18-10-08

UNIT:  
mm

CHECKED:

DATE:

18-10-08

SCALE:  
FULL

APPROVED:

DATE:

18-10-08

SIZE:  
A4