

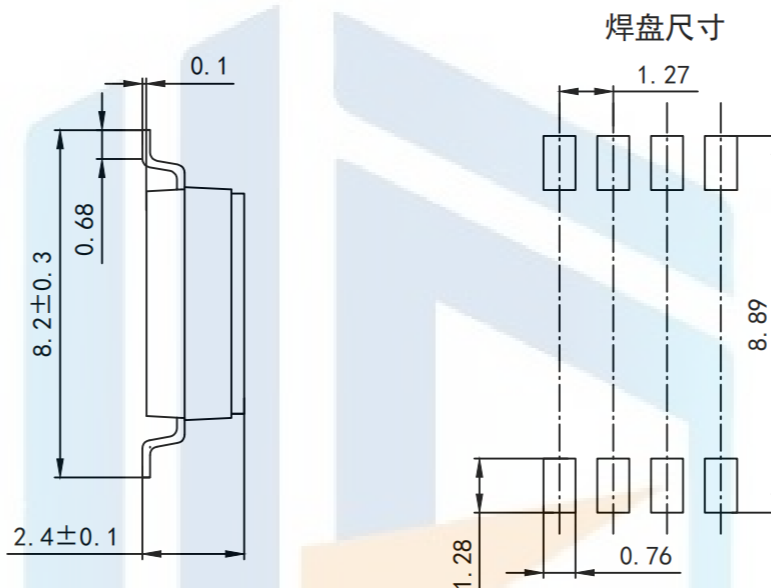


RoHS2.0  
Compliant

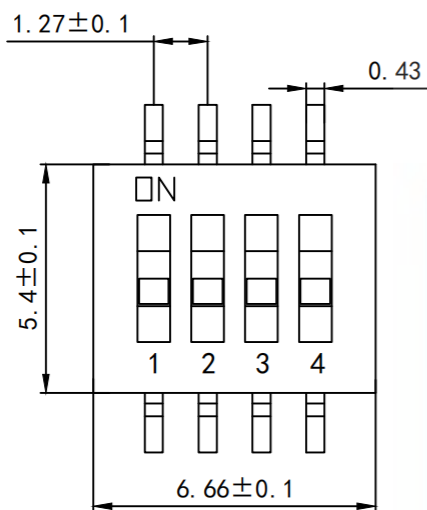

焊盘尺寸

电路图

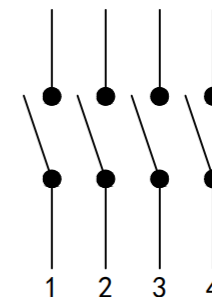

1. Performance:

Current specification: 100mA, 50VDC

Contact Resistance: 100mΩ Max

Insulation resistance: 100MΩ

Service life: 1000 times

Operating force: 200g Max.

Operating temperature: -30°C~80°C


2. Welding requirements:

Reflow soldering: 250 degrees, 5 seconds

TOLERANCE

X. XXX	±0.05
X. XX	±0.15
X. X	±0.20
X.	±0.30
ANGLE	±5.0°

PROTECTON



东莞市恒祺电子科技有限公司

Dongguan Hengqi Electronic Technology Co., Ltd

<https://www.hq-dz.com>

phone:15812872448

TITLE:

拨码开关

PART NO:HS004

DRAWING NO:6.66\*5.4\*1.27

DRAWN:

DATE:

18-10-08

UNIT:  
mm

CHECKED:

DATE:

18-10-08

SCALE:  
FULL

APPROVED:

DATE:

18-10-08

SIZE:  
A4